

SX-2000WG+ Wireless/Wired Hi-Speed USB Device Server 11g

!Now Supports Isochronous Devices!



Provides instant Wi-Fi access to your Hi-Speed USB Devices

Ultimate Freedom to Remotely Use Your USB Devices


! Macintosh compatible !

Features & benefits

- Instantly Convert Your USB Devices to a Shared Resource on Your 802.11g/b WLAN.** The Hi-Speed Wireless USB Device Server provides 802.11g/b wireless or 10/100 Base-TX wired LAN connectivity for USB 2.0 Hi-speed devices. It instantly converts the connected device(s) for access anywhere on your wireless LAN. Now you can enjoy the convenience and freedom of remotely using multifunction printers, scanners, storage devices, or various other USB devices*. It brings flexibility and productivity of USB devices to a whole new level.
- Easy Wireless Configuration with Microsoft Windows Connect Now.** The SX-2000WG+ supports Microsoft Windows "Connect Now"**. It simplifies the complicated wireless LAN initial configuration. The process is very easy. Use the Windows XP Connect Now wizard, save the results on your USB flash-tumb drive, then insert the thumb drive to the device server. The Server creates the wireless configuration automatically in a few minutes. Alternatively, the Hi-Speed Wireless USB Device Server can be configured over a wired LAN connection.



Networking example

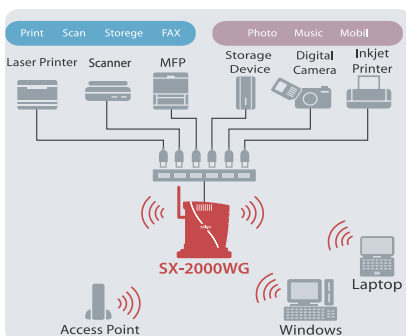

SILEX SX-Virtual Link allows you to see what devices are available across your LAN on a real time basis. You can also set your individual USB device application software to be launched automatically when the device is connected to your PC.



Technical Specifications

Supported Operating Systems	Windows 2000/XP, Windows Server 2003/2008* Windows Vista (32/64 bit); MacOS 10.2.7 or higher
Supported protocols	TCP/IP
Printer interface	USB 2.0 Hi-Speed (A-Type) x 1
Network interface	IEEE802.11b/g wireless (1M/2M/5.5M/11M/24M/36M/54M Auto-detection) 10 Base-T / 100 Base-TX (Auto-detection)
Wireless Security	WEP(64/128), SSID, WPA-PSK(TKIP/AES)
Total number of USB interface connections	15 (including USB Hub)
Configuration	Web browser, Quick Setup, telnet
Languages (Installation utility)	English, German, French, Italian, Spanish, Portuguese, Chinese, Japanese
Power supply	Universal AC adapter (AC100 - 240V)
Power consumption	9W (DC5V 1.8A)
Warranty	2 years
Regulatory approvals	FCC, CE, VCCI Class B
Package Contents	SX-2000WG, Setup Guide, AC adapter, Warranty booklet, CD-ROM with configuration utilities and PDF manuals, Antenna, Stand
Dimensions	36 x 140 x 143 mm (excl. Antenna & Stand) 1.4 x 4.5 x 5.4 in (excl. Antenna & Stand)
Weight	172g / 5.6 oz (excl. Antenna & Stand)

*Some USB devices may not be supported depending on the USB device driver specification. Isochronous support is limited to USB 2.0 full-speed only. Please visit our web site or contact silex technical support center for the latest compatibility information.

**Supported only with Windows XP Service Pack2 or greater.

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support:



Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3781
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-74-1199
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-6440-3958
www.silex.com.cn
> contact@silex.com.cn

SX2000WG+2008EN