

IPv6-IPv4 Converter

SX-2600CV



Convert to IPv6 at Low Cost with Ease.

Making Existing Network Devices Operable in IPv6 Environment


Overview

Using SX-2600CV will make IPv4 products operable in an IPv6 environment easily and inexpensively.

It is an external box that serves as a gateway for traditional IPv4-only devices by translating the IPv4 protocol to work over IPv6, expanding its communication range.

Since devices that support IPv4 only cannot be used in an IPv6 environment, IPv4 devices would need to be replaced, incurring expenses associated with administration, configuration, and operation.

Networking example

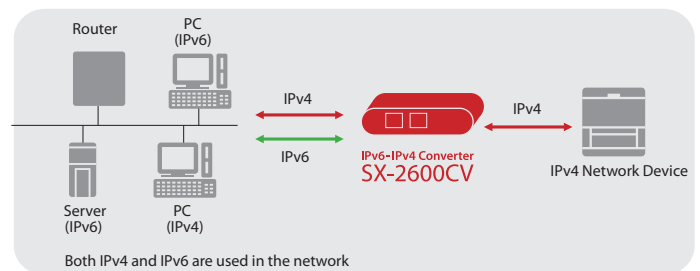

Features

- Makes IPv4-only devices operable in an IPv6 environment.
- Can be used in environments that use both IPv6 and IPv4. Bridges protocols other than IPv6 and IPv4. *
- Superior quality, reliability, and support: both hardware and software are developed and manufactured by SILEX.
- Simple setup, simple operation. **

* Some protocols are not supported.

** Supports bulk configuration using a .csv file.

Specifications

Interfaces:	10BASE-T/100BASE-TX (auto detection) 2 ports *AUTO-MDI/MDIX supported
Certifications:	VCCI Class-B, FCC Class-B, CE Class-B
Includes:	Setup Guide, AC Adapter
Configuration Utility:	Web browser (supporting bulk configuration using a .csv file)



Order No. SX-2600CV

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY Europe GmbH. All rights reserved.

Global sales & support: